Cube Testing Module –RFI request Process for Contractor using Jal Rekha mobile App.

1. **Login into Jal Rekha app and click on Cube Testing Module.**
2. **Sync Cube Module – Click on Sync Data.**
3. **Once synced, click on Cube Testing Survey.**
4. **Select Components where concreting work going.**
5. **Fill all require detail.**
6. **Click on Next.**
7. **A RFI number generate. Select no of Cubes.**
8. **As no of cubes selected, An unique no for each cube will be generated automatically.**
9. **Mention these unique numbers to respective Cubes. The contractor engineer must engrave this auto-generated number on the respective cube and should be visible Clearerly.**
10. **After that take photos of all cubes from App as per auto generated cube numbers & upload.**
11. **Click on Save.**
12. **Once RFI saved, It will go to GM PIU for further action.**
13. **In case of Network issue, Save RFI and upload later. When you are back in network, then upload.**
14. **Go to Survey History. All the RFI uploaded will be listed here. Open the RFI id you Uploaded to see the detail and cubes photos.**
15. **In case of any cube failed and RFI rejected by field Engineer, it will be visibled in Rejected Survey history. Check requlary and rectify the work as per observation. You need to raise Reinspection RFI from Rejected Survey History for further test of Cubes like Rebound Hammer Test, NDT. Once contractor raised request for Re-Inspection it will go to Field Engineer for further test procedures.**

Key Points:


Always sync before starting a new survey.


Double-check details before final submission.

Do not create new RFI id for rejected inspection.


Raise Re-Inspection request against rejected RFI id.


Engrave the auto-generated number on cubes and upload photos of each cube with this number.

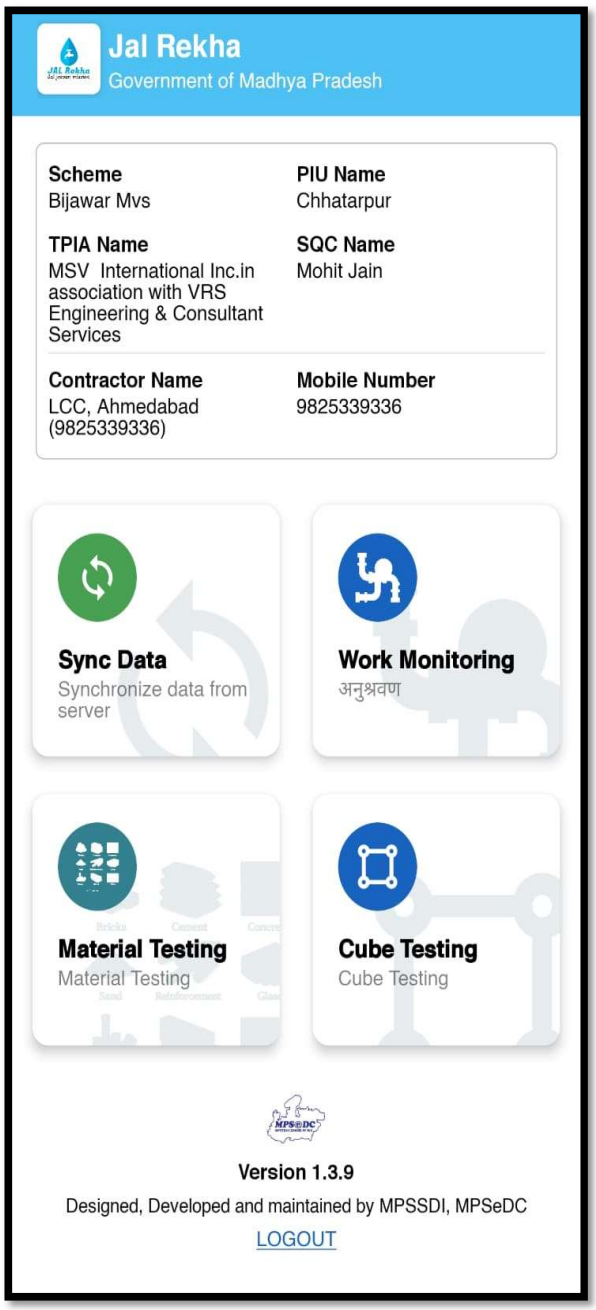

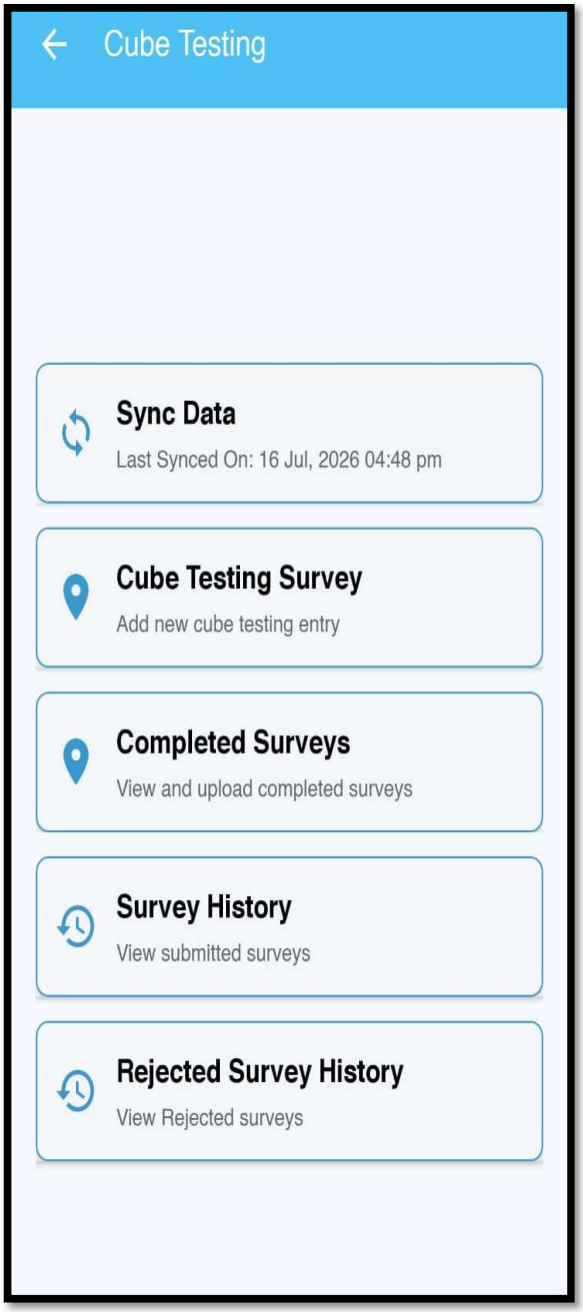


Ist click on Sync data, once synce successful message comes, then click on Cube Testing Survey.

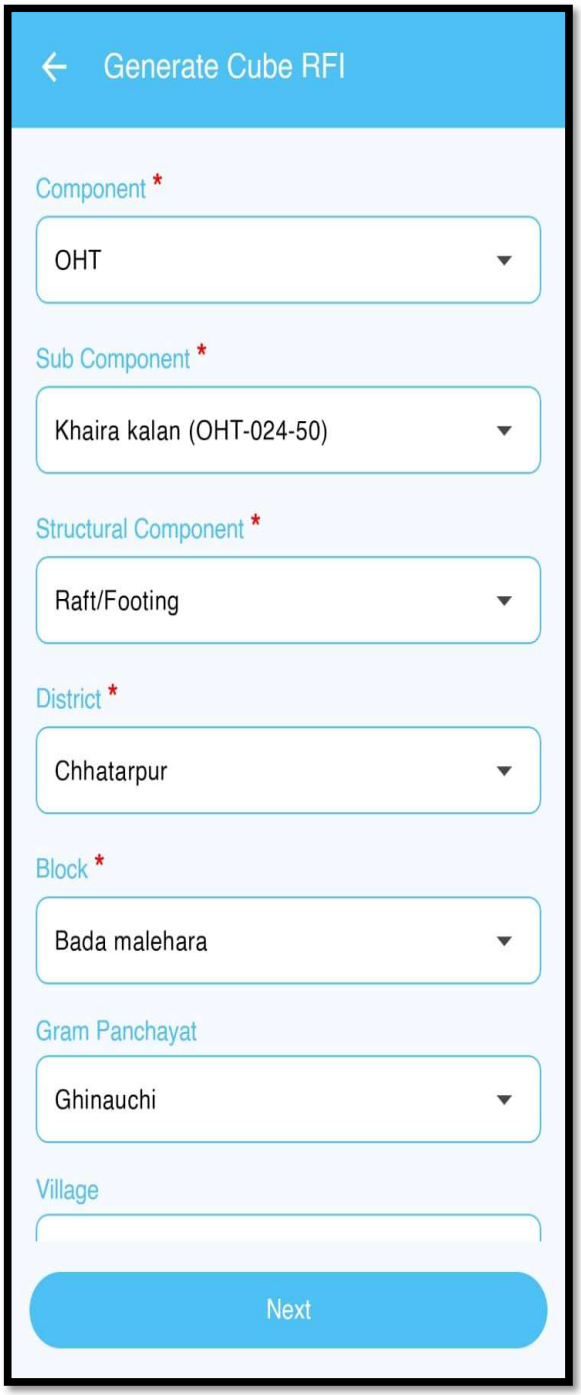

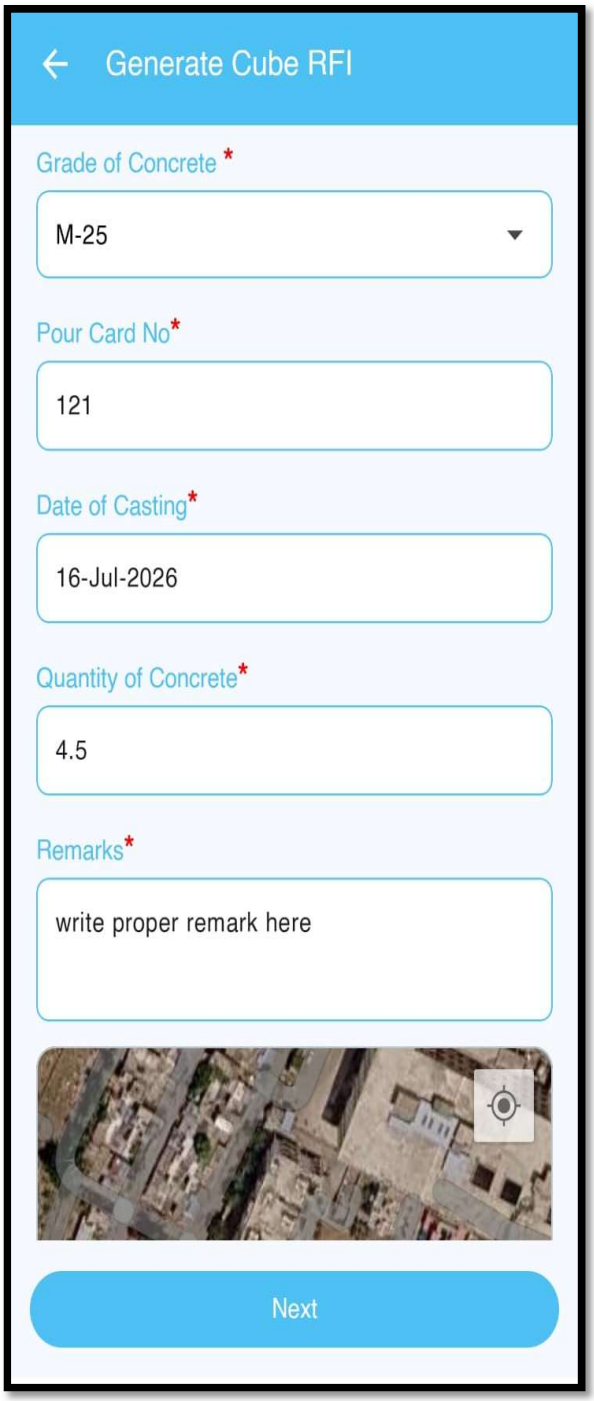

I

Fill all require detail and then click on Next.

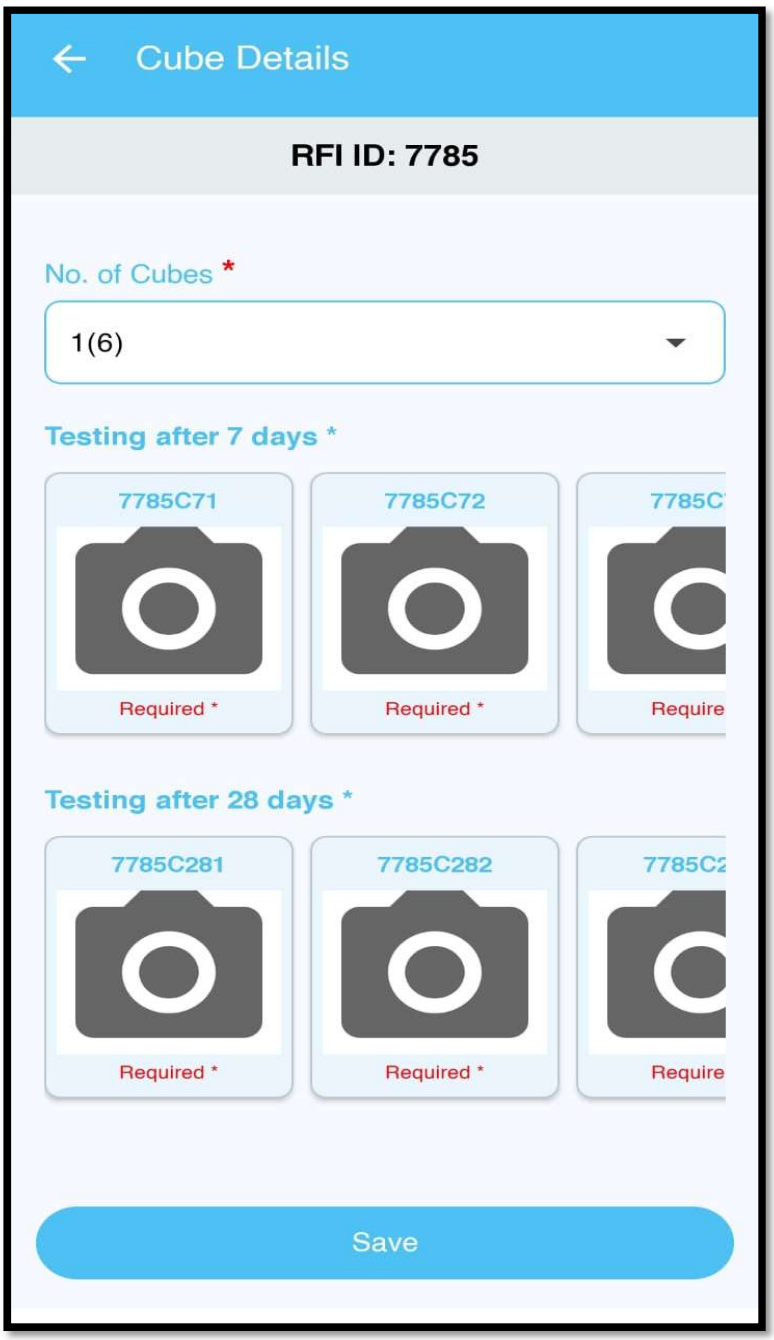

This RFI number generate automatically.

Select no of Cubes based on Quantity.

After select from Drop Down, Cubes option appear for 7 Days and 28 Days.

For each cube, an unique number will be generated ex **7785C71.**

Engrave this number on respective Cube, and click on photo option to take photos of respective cubes.

Upload all require photos and click on Save.

Once Save, it will go to GM PIU for further action.

In case you are not in Network area, after Save, RFI will go to completed survey. Where you can find raised RFI and go to network and upload.

You can see all raised RFI in survey history.

Process to raise Re-Inspection RFI – In case of Cube failed and RFI rejected by FE and GM PIU. Then rejected RFI will reflect in **Rejected Survey History on Contractor login. In Rejected Survey History, where can see all rejected RFIs.** If want to raise then click on Re-Inspection, new screen will appear. You need to take photos and upload PDF as document, mention date for Inspection (date of casting in app), mention remarks and click on Submit. In PDF you can add photos, reports **etc.** This RFI will go to Field engineer further action on mention date.

